



ESA Messtechnik GmbH

Schlossstr. 119 - D-82140 Olching / München
 Telefon: +49 (0)8142 444 130 - Fax: +49 (0)8142 444 131
 Internet: www.esa-messtechnik.de
 E-Mail: info@esa-messtechnik.de

TRANSDUCER AMPLIFIER MODEL CL 71

FEATURES:

- High accuracy
- Rugged design
- 24 V DC
- Operating temperature -25 to 65 °C
- Triwiring line



Mod. CL 71 DC amplifier is designed for use with industrial applications in hostile climatic and mechanical environments. It is particularly recommended when a high degree of protection against dust, vibrations and humidity is required.

Mod. CL 71 is an ideal amplifier unit for strain gauge based pressure sensors, load cells and force sensors in unipolar measuring mode, i.e. either in tension or in compression. Its input circuitry is compatible with 120 Ω to 1200 Ω strain gauge full bridge configurations.


TECHNICAL SPECIFICATIONS:

		Min	Typ	Max
Operating temperature* in °C		-25	-	+65
Signal cable length in m		-	-	3
Signal band width in Hz		DC	200 **	1000
Bridge excitation in V		5 **	10 **	10
Bridge resistance in Ω		120	350	1200
Input sensitivity in mV/V		0,5	2	100
Nonlinearity in %FS		-	-	0,02
Temperature coefficient of gain in % FS/°C		-	0,001	0,005
Temperature coefficient of zero in % FS/°C		-	0,001	0,002
Gain adjustment in % FS		-	Factory-set	+/-5
Zero adjustment in % FS		-	Factory-set	+/-5
Input	- Type	symmetric		
	- Resistance in GΩ	1	-	-
Output	- Type	asymmetric		
	- Current in mA	4	-	20
	- Impedance in Ω	-	-	500
Supply	- Voltage in V	+12	+24	+30
	- Current in mA	44	-	80
	- Cable length in m	-	-	3

* optional temperature range of -40 ° C to +85 ° C

** Factory settings

CONNECTION DIAGRAM:

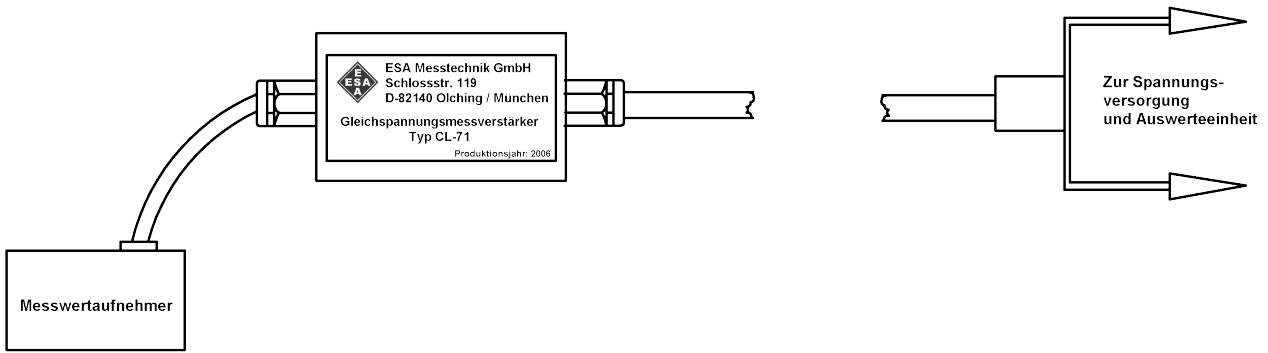

DIMENSIONS:

